

DTC – DIE THERMAL CONTROL

A modern Thermography System for increasing
the HPDC quality process and control

CASE STUDY

Case Study #1

Interaction DTC – Robot Spray

European Customer



- Customer – ChemTrend – Inprotec IRT
- Trial with interactive DTC – Robot spray
- Complex and heavy parts – 8kg GH




Main targets

- Interactive control DTC – ABB Robot
 - Avoid soldering and stopped machine occurrences
- Understand and define the best warm-up curve
 - Increase productivity and reduce scrap
- Improve OEE
 - Overall equipment effectiveness of the HPDC cell

Results

Warm-up


Old condition Optimization

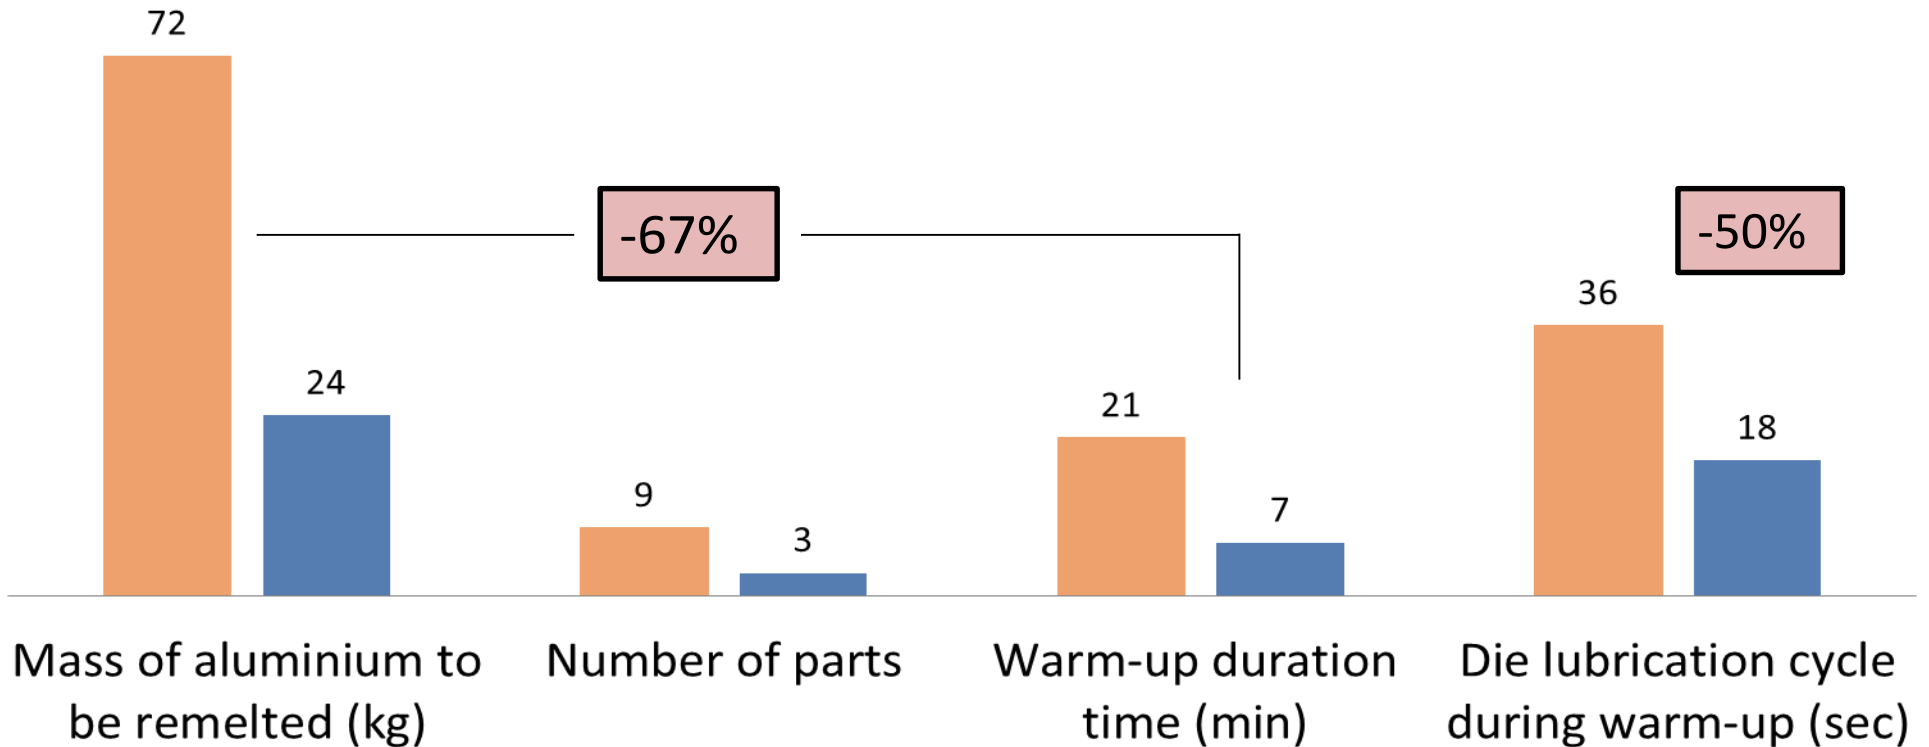

Results


Productivity

■ Old condition ■ Optimization

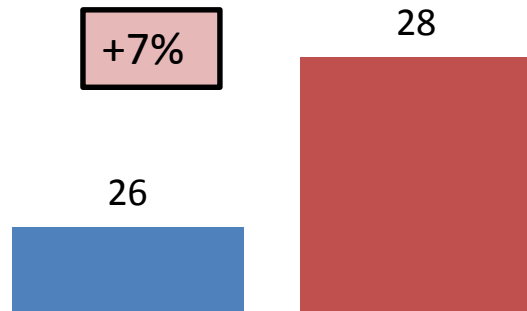

Number of parts produced per hour

Stopped machine - thermal reasons

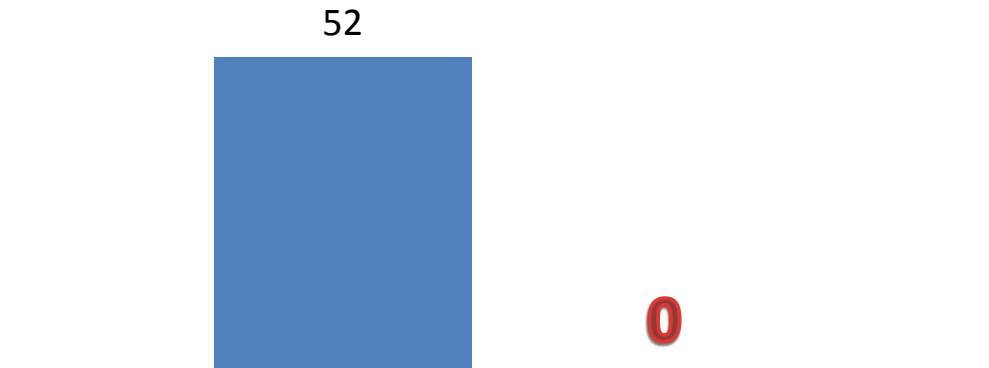

Number of hours by month

- Estimated monthly cost for a 2,700 tons DCM stopped:
 - In 22 working days: 52 hours stopped
 - 150 €/hour (estimation from a DCM producer)
 - TOTAL of approximately 7,800 €/month

Results

- Good interaction between DTC-ABB Lubrication Robot
 - Variation of the lubrication cycle according to DTC alarm limits
- Reduction in the defect occurrences
- Optimization of the die lubrication cycle
 - Wastewater reduction
- Improvement of 3.5% in OEE
 - Overall equipment effectiveness of the HPDC cell

Conclusions


- The DTC is an «open» device:
 - Interface with peripheral devices is real
- The DTC is a monitoring device for the series production:
 - Productivity improvement
- Tailor-made on Customer's needs

Case Study #2

Casting defects – Surface temperature





European Customer

- Customer – ChemTrend – Inprotec IRT
- Casting defects – Surface temperature
- Complex and heavy parts – xxx GH

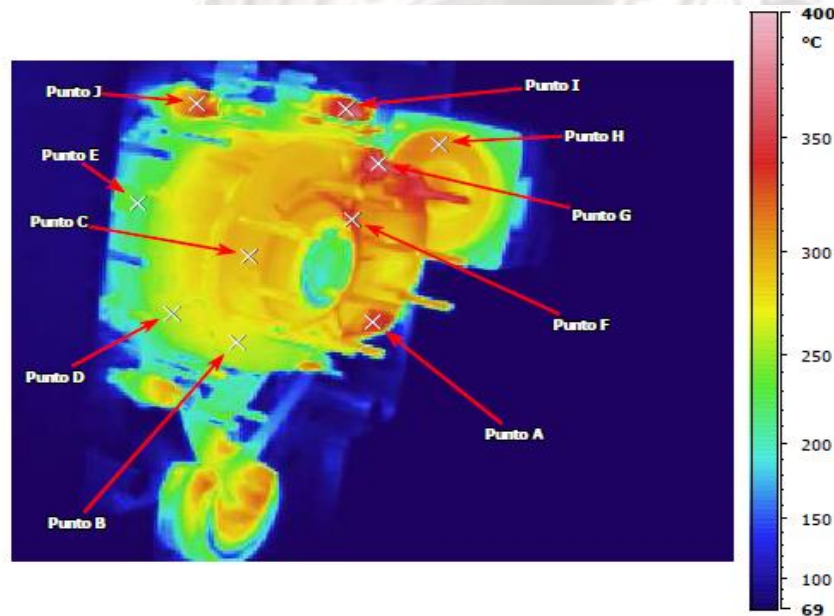

Monitoring and understanding


- Complete diagnostic

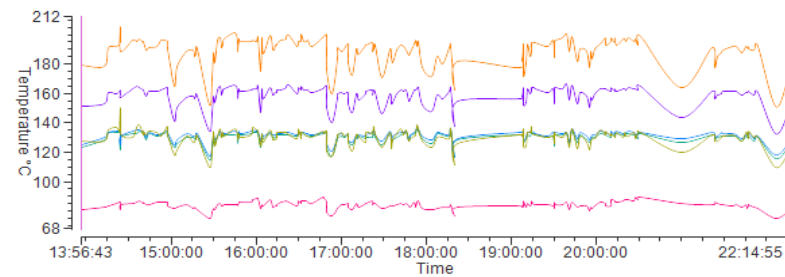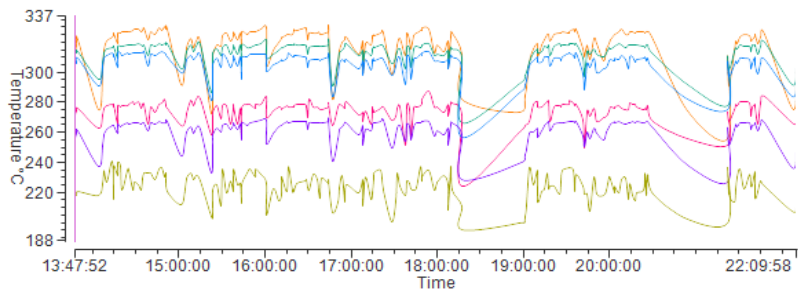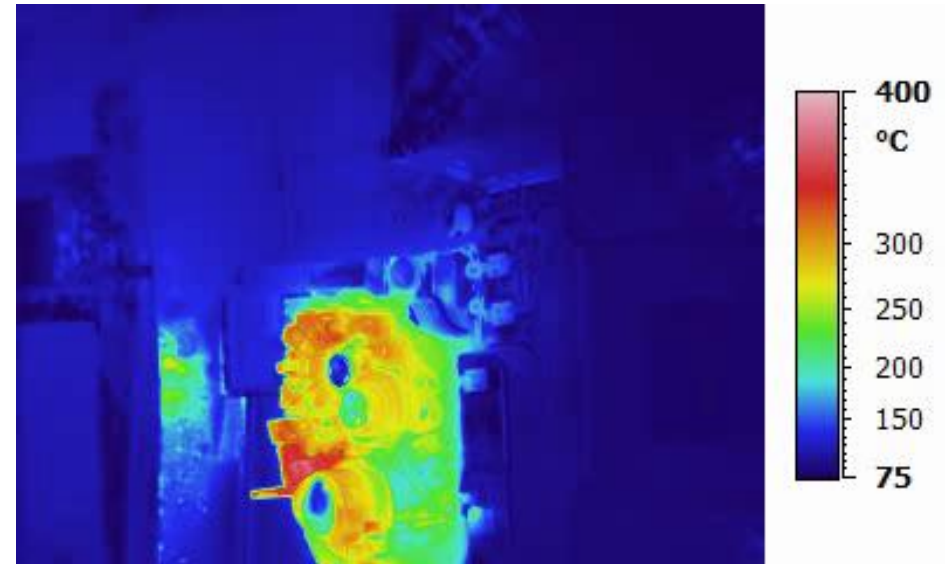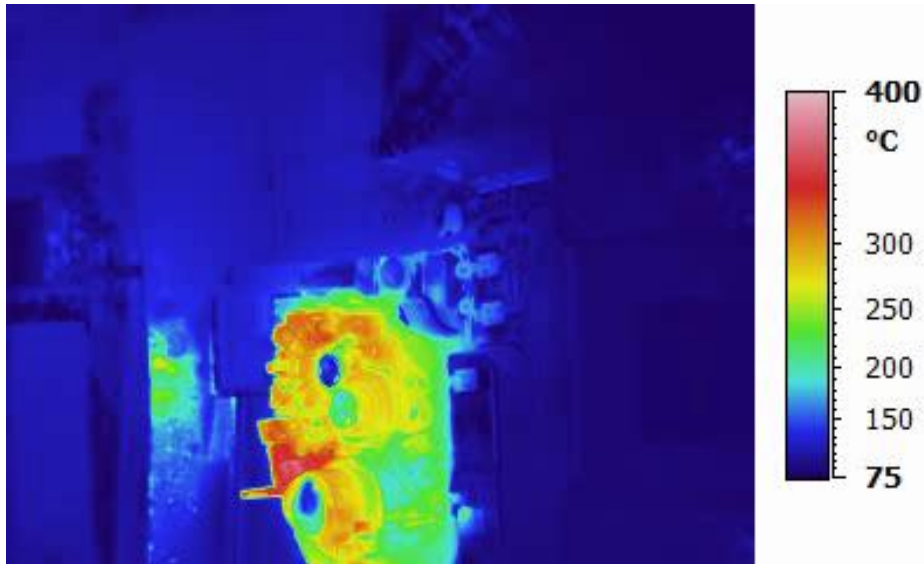


Results

Parameters	Old condition	Optimization	Variation
Average temp before spraying (°C)	305	307	2
Average temp after spraying (°C)	98	150	52
Temp variation Pre-Post (°C)	207	157	-50

Die lubricant

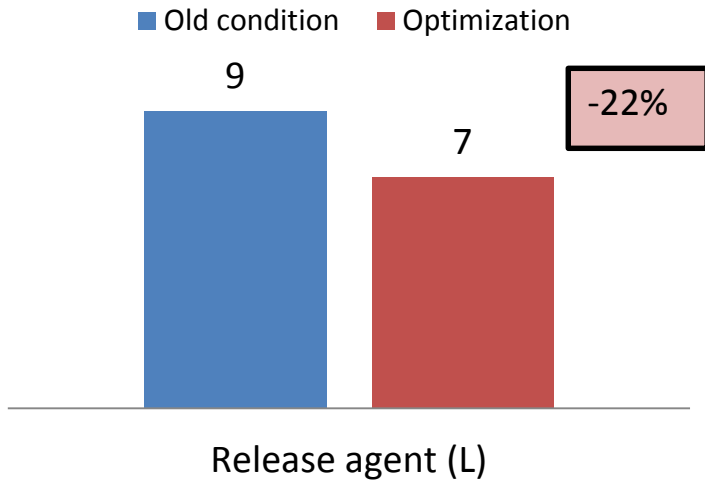

Process improvements

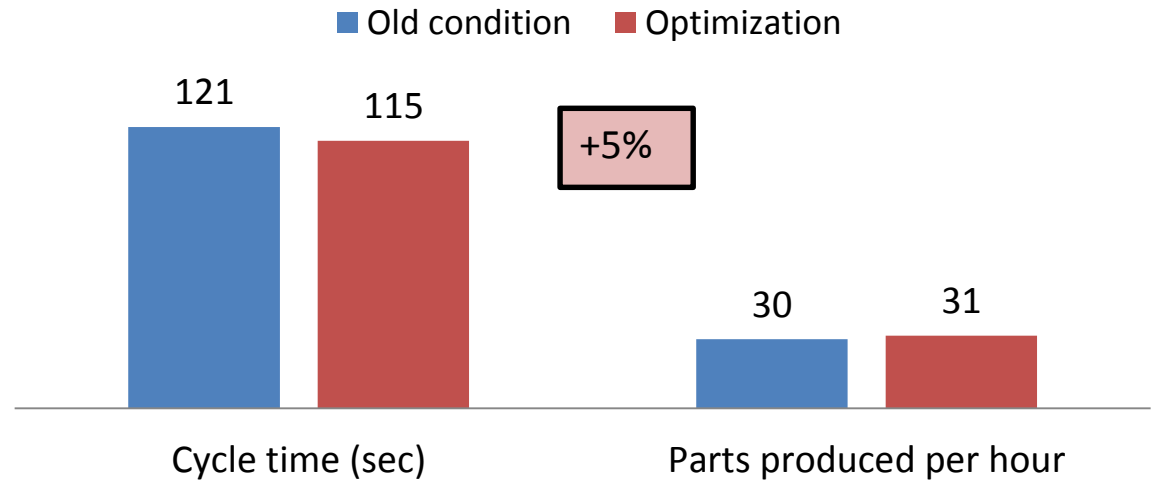

Results

- Die surface temperature optimized
- Die lubricant reduced in 22%
 - Wastewater reduction
- Enhanced casting quality
 - The X-ray test showed markedly reduced pores
 - Cold flows, shrinkages and die-solderings, were eliminated
- Increased productivity in + 5%
- Design of the spraying programs on other machines

Customer comments and conclusions

- *Monitoring and controlling the die surface temperature can result on fundamental process improvement*
- *The DTC device clearly showed the high benefit as a valuable tool to analyze production processes and to identify any potential optimization*
- *The results of the first project showed that the high benefit of the DTC will also pay off the investment in a short time*

DTC – Die Thermal Control System



Thermography in HPDC

- Useful technology to:
 - Understand the thermal balance of a die surface
 - Select the correct Release Agent
 - Adjust its application


Main advantages:

- Fast (moving objects)
- Non-contact (no hazard)
- Overview of temperature
- Digital data
- In-line analysis
- Off-line analysis

The value-added

- The DTC is a monitoring device for the series production:
 - Start-up > reduction of scrap rate
 - Die Sampling > reduction of sampling times
 - Improved productivity > shorter lubrication times
 - Criticist «finder» > quality check
- The DTC is an «open» device:
 - I/O for interfacing and integration with others devices
 - Analog Input for future applications
 - Interfacing with peripheral possible > Spray-head, Thermoregulator, HPDC machine, etc.
 - Customer tailoring

Example of installation on DCM

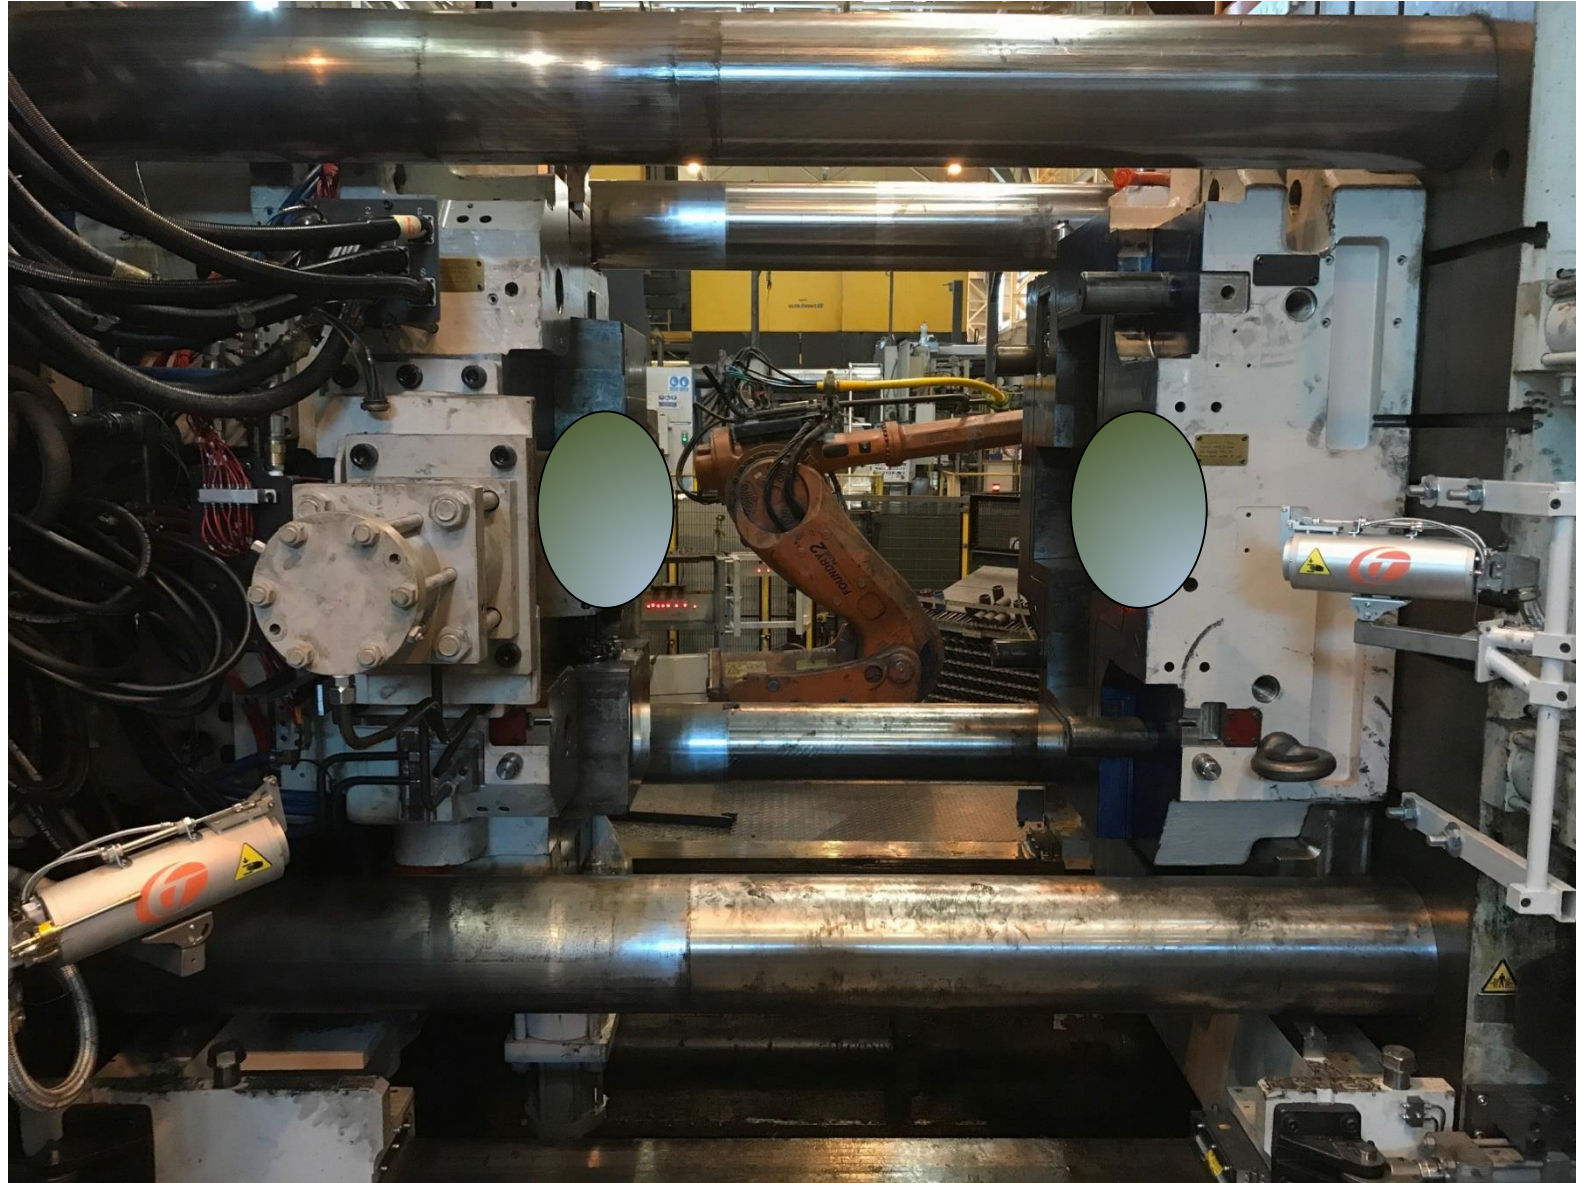

DTC - TROLLEY VERSION

INPROTEC IRT
The Thermal Infrared Solution



DTC – Fix version


- Developed for OEM to install on HPDC machine
 - All the version of DTC (Trolley, Fix, Remote) have the predisposition for the connection in the Network Ethernet of the customer, and is conforming to the requisite for “Industry 4.0”
 - Each DTC is also however autonomous and accessible in the place where is installed, with access through password.

IPOTESI B1


FRONT VIEW



RIGHT SIDE VIEW

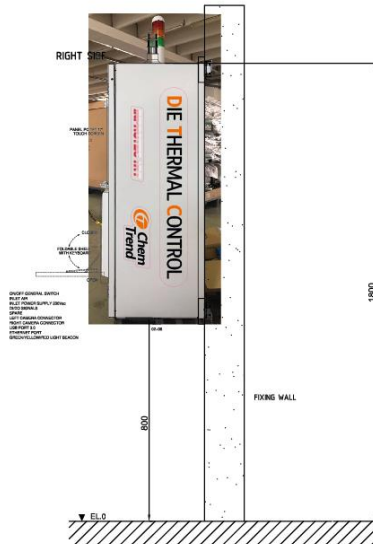

LEFT SIDE VIEW

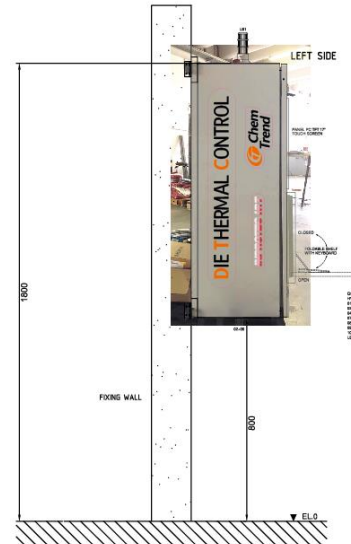

ELECTRO-PNEUMATIC BOX
CSC106035 IP55
1000x600x350mm

DRAWING SCALE 1:10




DTC – Remote version

- Developed for Custom installation on HPDC machine




Panel PC positioned to operator side on mobile arm and electro-pneumatic cabinet installed on wall or on raised support

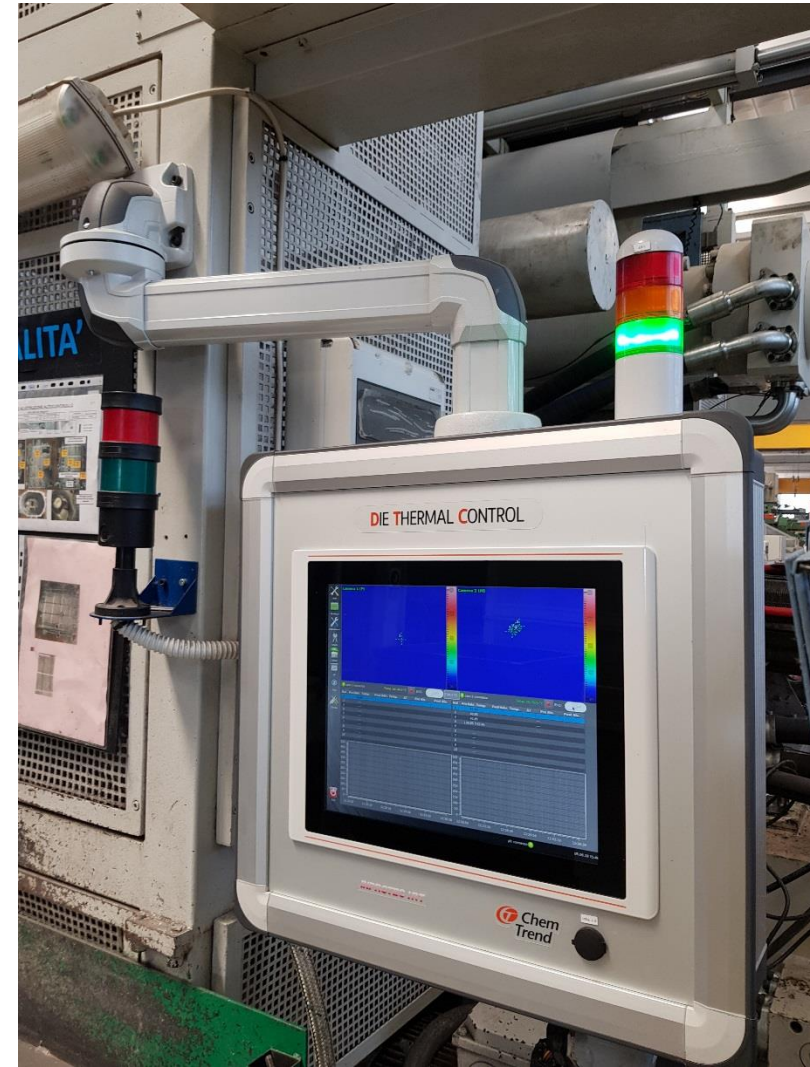

DTC – Remote version

- Developed for Custom installation on HPDC machine

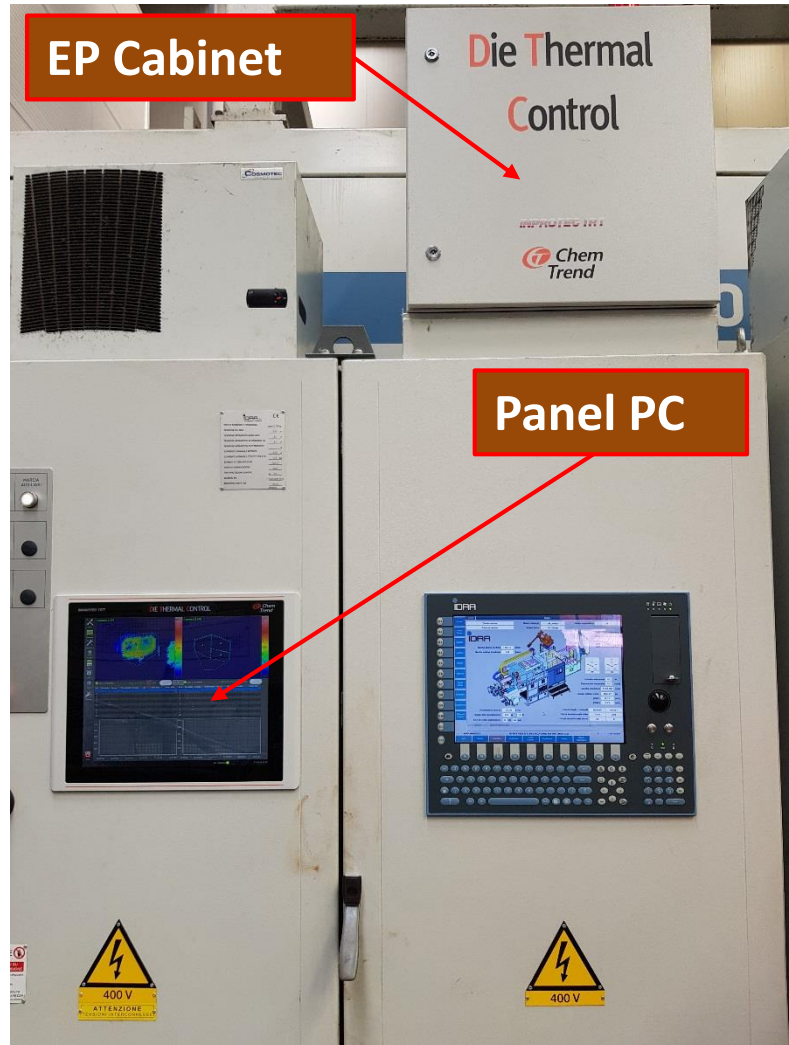

Panel PC
integrated on
DCM cabinet
and electro-
pneumatic
cabinet
installed on
wall or on
raised support



Interfacing

- Possible interaction with peripheral's :
 - Robot
 - Spray head
 - Thermoregulators
 - HPDC machine
- Active process!
 - Target: closed-ring process
- Open modular system
- «Slave»
- Tailor-made on Customer's needs

DIE CASTING INDUSTRY 4.0

Global approach

- Many devices affect temperature:
 - TCUs, sprayers, pin coolers, spot coolers, air blowers...
- In most cases, all these devices are coordinated by process technicians, but there is a lack of integration.
- Tools must be prepared to control temperature. Tool makers bear the responsibility in making temperature control possible.
- Temperature control is the result of a synergy of systems.




Need of a global approach !

PROFINET Integration



DTC NETWORK

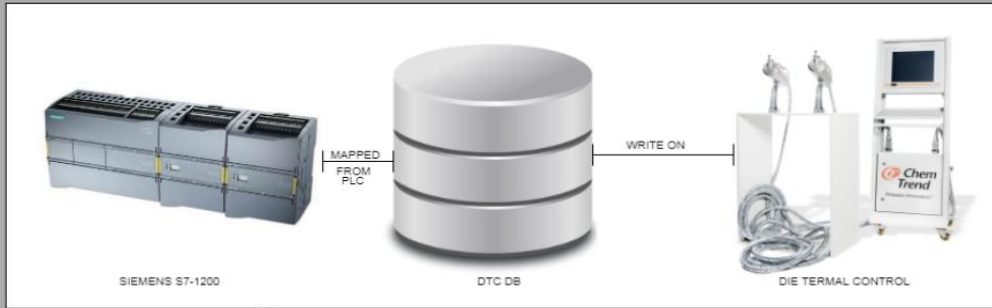

DCM SIDE




SEND SIGNAL TO DTC

DCM NETWORK



SEND DB TO PN/PN COUPLER

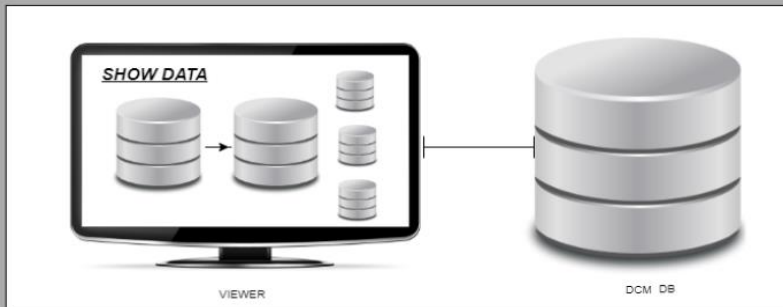

FILL DATA TO DCM DB


DTC Plugin system – intro

- Plugins allow full DTC customizations
- DTC „Plugin“ concept is similar to „app“ for Smartphones device: adapts the device to users specific requirements, without losing the ability to update the system core (new features, optimizations,..)
- Plugins are an user interface to.....
 - ✓ HW systems connected to DTC (thermoregulators, DCMs, Lubrication robots,.....)
 - ✓ SW systems (MES, Network servers, Network databases,..)
 - ✓ DTC's optional devices
 - ✓ Customer's special requirements

Reaction





Long-term

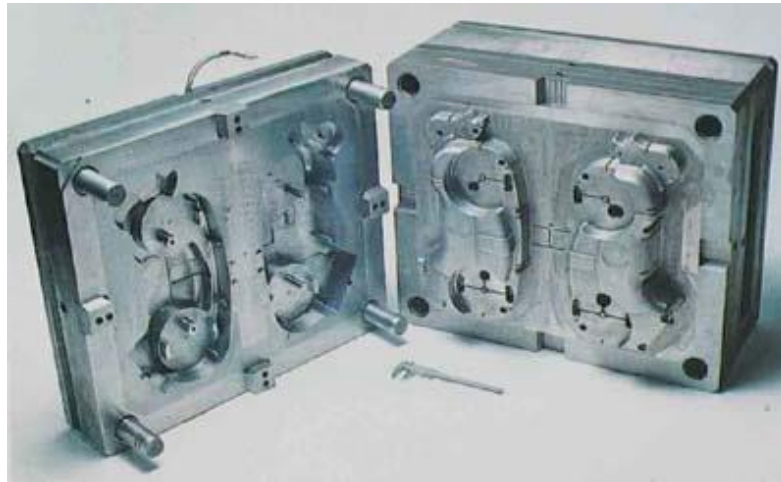

Short-term



**RELEASE AGENTS
&
DIE LUBRICANTS**

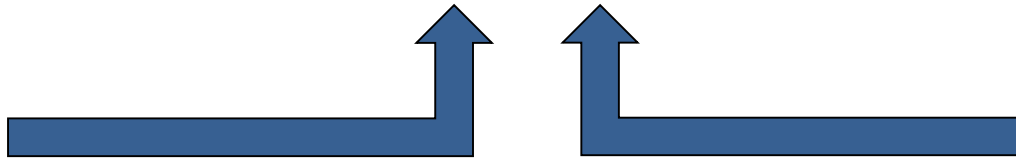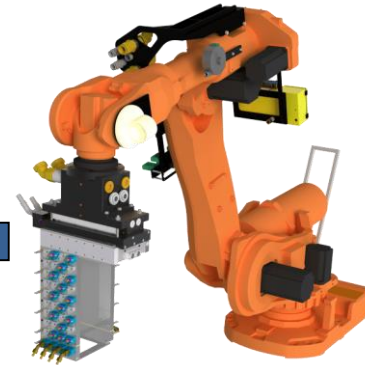

Die Casting Industry 4.0

- The DTC has been tested from IMQ (Institute for the Quality Mark), Institute recognized by Italian Government for the asseveration of systems and plants for the Industry 4.0 regulation

BUSINESS UNIT MANAGEMENT SYSTEMS

IMQ

Relazione Tecnica

Rif. No. A779
Data: 2017-06-30

Relazione Tecnica – Sistema Die Thermal Control

RICHIEDENTE: **INPROTEC IRT SRL**
Via Beethoven, 24 – 20092 Cinisello Balsamo (MI)

ALTRE INFORMAZIONI: Data del sopralluogo: 15/09/2017
Luogo del sopralluogo: Cinisello Balsamo

Nr. Pagine documento: 10
Nr. Allegati: 1

Responsabile della Valutazione: **Bringhenti Lorenzo**
Approvato da: **Deigo Ferrari**

[Handwritten signatures]

BUSINESS UNIT MANAGEMENT SYSTEMS

6 CONCLUSIONI

A conclusione dell'attività svolta si può affermare che il sistema "Die Thermal Control" e il relativo software che ne permette il funzionamento sono ascrivibili al punto 2 del capitolo "sistemi per l'assicurazione della qualità e della sostenibilità" presente nell'Allegato A alla L.11/12/2016 n. 232 e per la precisione al punto:

- **Altri sistemi di monitoraggio in process per assicurare e tracciare la qualità del prodotto o del processo produttivo e che consentono di qualificare i processi di produzione in maniera documentabile e connessa al sistema informativo di fabbrica**

Come chiarito al punto 12 secondo capoverso Terza Parte della Circolare N.4/E del 30/03/2017 i sistemi di monitoraggio in process per assicurare e tracciare la qualità e del prodotto e del processo produttivo DEVONO consentire di qualificare i processi di produzione in maniera documentabile e connessa al sistema informativo di fabbrica. Dalla nostra analisi si ritiene che entrambi i requisiti sono soddisfatti, come si evince dalle funzionalità descritte all'interno del cap. 5 "Descrizione del bene".

In sintesi si può concludere che il sistema DTC oggetto della presente valutazione può essere definito come bene "Industry 4.0" in quanto soddisfa tutte le caratteristiche citate al punto 12, secondo capoverso Terza Parte della Circolare N.4/E del 30/03/2017.

ALLEGATI

Dichiarazione di Conformità CE ai sensi della Direttiva 2006/42/CE

Mod. FT_01
IMQ S.p.A. - con Socio Unico | Via Quintilano 43 | Italia - 20138 Milano | www.imq.it
Pagina 9 di 10

....the DTC system can be defined "Industry 4.0" because it satisfies all the characteristics indicated at point 12, ...of the circular N.4/E dated 30/03/2017

Award won at

